

7-17-00

14

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT APPLICATION TRANSMITTAL

COMMISSIONER FOR PATENTS  
Box Patent Application  
Washington, D.C. 20231

Attorney Docket No.: 21778.04300  
Application Number: Unassigned  
Art Unit: Unassigned  
Examiner: Unassigned  
PTO Customer Number: 022872

Dear Honorable Sir:

Transmitted herewith for filing is an original utility patent application of:

Ryogo KATAYAMA and Teruyasu HANAGAMI both citizens of Japan, and both residing in Kanagawa, JAPAN; and both having a post office address consisting of: c/o Sony Corporation; 7-35, Kitashinagawa 6-chome; Shinagawa-ku, Tokyo, JAPAN;

entitled: PRINTING APPARATUS AND COLOR ADJUSTING METHOD

ENCLOSED are the following:

1. ☒ Specification, abstract and claims of 22 pages.
2. ☒ 8 sheets of ☒ formal ☐ informal drawings ☐ No drawings.
3. ☒ Declaration and Power of Attorney form PTO/SB/106 (original or copy) by the named inventors.
4. ☐ Preliminary Amendment
5. ☐ Information Disclosure Statement
6. ☒ Other: One original and one copy of three pages of assignment documents.

**Kindly NOTE the following:**

7. ☐ Applicant is a small entity. Copy of Small Entity Statement (unsigned) enclosed – 50% Filing Fee Reduction (if applicable)
8. ☐ The prior application is assigned to
9. This application is a:  
☐ Continuation ☐ Divisional ☐ Continuation-in-Part (CIP) of Prior Application
10. ☒ Priority of the following application is claimed under 35 U.S.C. § 119:

Serial No.	Date Filed	Country	Certified Copy of Priority Doc. Filed	
			USSN or PCT#	Date
P11-203724	July 16, 1999	JAPAN		Filed on an even date herewith


11. ☐ An Extension of Time is filed concurrently herewith for the parent application.
12. ☐ Cancel claims \_\_\_\_\_ prior to calculation of the filing fee.

**FILING FEE:** calculated below (after accounting for any preliminary amendment or claims cancellations if noted above):

<input checked="" type="checkbox"/>	Total Claims	17	Total Claims Subject to Fees: 0	\$0.00
<input checked="" type="checkbox"/>	Independent Claims	2	Total Claims Subject to Fees: 0	\$0.00
<input type="checkbox"/>	Multiple Dependent Claims	0	Total Claims Subject to Fees: 0	\$0.00
<input checked="" type="checkbox"/>	Basic Filing Fee			\$690.00
<input type="checkbox"/>	Extension Fees			\$0.00
	<b>Sub-Total</b>			<b>\$690.00</b>
<input type="checkbox"/>	Less Small Entity Fee Reduction			\$0.00
<input checked="" type="checkbox"/>	Assignment Recordal Fees			\$40.00
	<b>Total Fees</b>			<b>\$730.00</b>

- ☒ Enclosed is check number 469904 in the amount of \$730.00 for the filing fees above-mentioned. The Commissioner is hereby authorized to charge any fee or additional fee due in connection with this filing to Deposit Account No. 03-3821, **referencing Attorney Docket No. 21778.04300. A duplicate of this sheet is enclosed for this purpose.**
- ☒ The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR §§ 1.16 or 1.17 to Deposit Account No. 03-3821, **referencing Attorney Docket No. 21778.04300. An additional duplicate copy of this sheet is enclosed, for this purpose, if necessary.**

Respectfully submitted,



By: Adam H. Tachner  
Registration No.: 40,343

Date: July 14, 2000


Crosby, Heafey, Roach & May  
Two Embarcadero Center, Suite 2000  
P.O. Box 7936, San Francisco, CA 94120-7936  
(415) 543-8700 Voice, (415) 391-8269 Fax

Certificate of Mailing by "Express Mail"

Express Mail Mailing Label Number: EL401493965US Date of Deposit: July 15, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service By "Express Mail Post Office Addressee" Service under 37 CFR 1.10 on the date indicated Above and is addressed to the Commissioner for Patents, Box New Applications, Washington, DC 20231

Brian N. Marion  
Name of Mailing Individual

  
Signature of Mailing Individual

## TITLE OF THE INVENTION

Printing Apparatus and Color Adjusting Method

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The present invention relates to a printing apparatus and color adjusting method, in which a desired color adjustment can easily be done of an input analog video signal before the signal is printed on a printing paper.

### 2. Description of the Related Art

With the conventional printer to print an input analog video signal on a printing paper, the user adjusts colors such as yellow (Y), magenta (M) and cyan (C) by printing the signal on the printing paper while displaying red (R), green (G) and blue (B) colors of the signal on a monitor.

Generally, many of the ordinary users have experiences with the subtractive mixture of colors in the adjustment of image colors . Thus, when adjusting additive process-based colors of an image being displayed on a video monitor for example, such a user can make no matching between the colors if he or she is not well familiar with the complementary relationship between the colors. Also since there exists a different in basic color appearance characteristic between the video monitor and print, it is difficult to accurately correlate color variations on the monitor with those in the print. Thus, in the conventional color matching, it is necessary to repeatedly adjust and print the colors until a user's ideal hue is

attained. Therefore, the conventional color matching consumes printing materials such as printing paper, ink ribbon, etc. very much. Also, it takes much time and great costs.

That is, the color matching with the conventional technique requires great costs (large consumption of printing paper, for example) and much time and in addition, needs knowledge of the colors. Therefore, the ordinary users cannot easily adjust image colors.

#### OBJECT AND SUMMARY OF THE INVENTION

Accordingly, the present invention has an object to overcome the above-mentioned drawbacks of the prior art by providing a printer and color adjusting method, in which image colors can be adjusted easily, quickly and inexpensively.

The above object can be attained by providing a printer to print a video signal using printing media including a printing ink ribbon and paper, the printer including according to the present invention:

an image processing means for storing a plurality of data different from each other in a value on which the color appearance characteristic of the printing media depends and converting, using the plurality of data, an image composed of R, G and B video signals based on the video signal to a complementary-color image consisting of a desired number of frames; and

means for printing an output from the image processing means using the printing media.

Also the above object can be attained by providing a color adjusting method for use in a printer to print a video signal using printing media including a printing ink ribbon and paper, the method including, according to the present invention, steps of:

storing a plurality of data different from each other in a value on which the color appearance characteristic of the printing media depends and converting, using the video signal, an image composed of R, G and B video signals based on the video signal to a complementary-color image consisting of a desired number of frames;

printing an output from the image processing step using the printing media;

selecting a desired one of the plurality of images printed on the printing paper at the printing step; and

adjusting the colors according to the desired image selected at the selecting step.

More specifically, an important portion (for which color matching is to be done) on the monitor screen is designated and a plurality of images different in color balance from each other is printed out on one printing paper. Favorite ones are selected from the plurality of printed images and stored into the printer, thus permitting to easily realize a desired color matching.

According to the present invention, the color matching can be done by printing once instead of the conventional cut-and-try method (which takes much

time and large costs). The color matching is possible without many prints (tens of prints as the case may be). Thus, it is possible to considerably cut the time and cost for the color matching.

Furthermore, according to the present invention, a desired color matching can easily be done without necessary knowledge for the color adjustment (yellow is a complementary color of blue, for example). Actually, a user's sensation of a color will hardly result in a successful color matching. The simplicity of the color matching and reduction of time for the color matching owing to the present invention will greatly contribute to the operability of the printer.

These objects and other objects, features and advantages of the present intention will become more apparent from the following detailed description of the preferred embodiments of the present invention when taken in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic block diagram of an embodiment of the printer according to the present invention;

FIG. 2 shows characteristic curves of digital data (for one color) converted from analog to digital by the A/D converter in the printer in FIG. 1;

FIG. 3 show input-output characteristic curves of Y, M and C;

FIG. 4 shows how to capture an image on the monitor screen;

FIG. 5 shows 25 areas (frame) in one print, made different in hue from each

other for the purpose of the color matching;

FIG. 6 show the correspondence between the frames in the print in FIG. 5 and asterisks (\*) on the monitor screen;

FIG. 7 shows a gamma ( $\gamma$ ) data table;

FIG. 8 is a timing chart showing times at which address in the gamma ( $\gamma$ ) correction memory (table) is changed from one to another in one line printed by the thermal print head;

FIG. 9 is a block diagram of the image processor in the printer in FIG. 1; and

FIG. 10 is a block diagram of the address changeover control circuit in the image processor in FIG. 9.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

An embodiment of the printer according to the present invention will be described herebelow. The embodiment of the printer carries out the color adjusting method.

Referring now to FIG. 1, there is schematically illustrated in the form of a block diagram then embodiment of the printer according to the present invention. The printer is intended to produce, on a printing paper, a hard copy output of an analog image signal from an input device such as a camera. As shown, analog R, G and B signals supplied at an input terminal are converted by an A/D converter 2 to digital R, G and B signals, respectively, and stored into a memory (DRAM) for example via a memory controller 3.

00516331.071500

The digital R, G and B signals read from the memory 8 by the memory controller 3 are passed to an image processor 4 in which they will be subjected to sharpness processing (enhancement), gamma ( $\gamma$ ) correction, etc. The gamma ( $\gamma$ ) correction will further be described later. The printer has a printing block 5 provided with a thermal print head for example. An output from the image processor 4 is supplied to the printing block 5 which will print, by the thermal print head, the output signal on a printing paper. Operations of the memory controller 3 and image processor 4 are controlled by a central processing unit (CPU) 6. The CPU 6 has a keyboard or keypad (shown as KEY) 7 connected thereto. The printer includes also a monitor 9. The output from the A/D converter 2 is sent to and displayed on the monitor 9. The monitor of the input device may be used as the monitor 9.

First, the gamma ( $\gamma$ ) correction effected in the image processor 4 will be described herebelow. The printing block 5 uses a sublimation ink ribbon and printing paper as printing media. When the sublimation ink ribbon is heated, the ink in the ribbon will be sublimed to color the printing paper. The color appearance characteristic varies greatly depending upon the printing media used.

FIG. 2 shows characteristic curves of digital data converted from analog to digital by the A/D converter 2 in the printer in FIG. 1. There is shown at the upper left of FIG. 2 a characteristic curve 31 of the digital data (for one color) converted from analog to digital by the A/D converter 2. The digital data showing this



characteristic curve 31 is an 8-bit data for example and variable in value correspondingly to 256 points (0 to 255). Ideally, the color appearance characteristic of image data to be printed should preferably be approximately a one represented by the characteristic curve 31. Actually, however, the color appearance characteristic depicts a curve 32 which will fall abruptly at a point  $p$  as shown at the lower right of FIG. 2. This color appearance characteristic 32 varies depending upon the printing media including the sublimation ink ribbon and printing paper. If the data from the memory controller 3 maintains the color appearance characteristic 32, the thermal printhead in the printing block 5 will print output an image quite different from the input image from the input device such as camera. To avoid this, the image processor 4 converts the actual color appearance characteristic 32 to a printed color appearance characteristic 34 shown at the upper right of FIG. 2 using a gamma ( $\gamma$ ) data characteristic 33 shown at the lower left of FIG. 2 and which controls the color appearance characteristic 32. This is the gamma ( $\gamma$ ) correction. The image processor 4 has a memory for the above gamma ( $\gamma$ ) correction as a gamma ( $\gamma$ ) data table which will further be described later. Colors printed by the printing block 5 are adjusted by the subtractive mixture of Y, M and C. The gamma ( $\gamma$ ) data table stores data being a combination of Y curve 35, M curve 36 and C curve 37 shown in FIG. 3. In the printer according to the present invention, digital R, G and B signals from the memory (DRAM) 3 in FIG. 1 are converted to Y, M and C signals by the image processor 4 using a YMC converter which will be

described later. Also, the Y, M and C signals are subjected to the gamma ( $\gamma$ ) correction using the gamma ( $\gamma$ ) data table.

In many cases, the printer shown in FIG. 1 is used in connection with a camera, medical endoscope, etc. Normally, a monitor device is connected to the camera or endoscope and thus generally the user observes the colors on the monitor screen. Conventionally, the colors in which an image is printed on a printing paper by the printing block 5 are also adjusted on the monitor screen. However, the colors on the monitor are adjusted by the additive mixture of R, G and B while the colors printed by the printing block 5 are adjusted by the subtractive mixture of Y, M and C. Therefore, the user cannot correctly adjust the colors unless he has a full understanding of the complementary relation between the R, G and B, and Y, M and C.

The printer according to the present invention adopts a color adjusting method in which using the gamma ( $\gamma$ ) data table in the image processor 4, it prints on a printing paper a plurality of images different from each other in color balance in portions thereof designed on the monitor screen, and the user is prompted to select his favorite one of the images and have the printer store it, thereby permitting to easily effect a desired color matching. Thus, the user can select an image having his desired colors from images he actually uses, and sets the selection information in the printer. After the color adjustment, the stored color setting will automatically result in a print in desired colors.

The color adjusting method will further described herebelow with reference to FIGS. 4 to 6. FIG. 4 shows how to capture an image on a monitor screen 10, FIG. 5 shows 25 areas (frame) in one print, made different in hue from each other for the purpose of the color matching, and FIG. 6 show the correspondence of the frames in the print in FIG. 5 with asterisks (\*) on the monitor screen. As shown in FIG. 4A, an input image 11 is first captured on the monitor screen 10. Next, the printer gets into the color matching mode and the user is prompted to select an area 12 in where the color matching is to be done. Further, the selected area 12 is printed for duplication for the purpose of the color matching as shown in FIG. 5. In one print 15, there will be printed 25 areas (frames), for example, made different in hue from each other for the purpose of the color matching. The user is prompted to select his favorite ones from the printed 25 frames different in hue from each other, and register them in the printer.

In the above embodiment, the images or frames in the print, different in hue from each other, count 25 in number. However, the number of the printed frames, namely, 25 frames, is just a not-limitative one. It may be 9, 49, 16 or 36 frames, for example.

Then, asterisks (\*) corresponding to the frames are displayed on the monitor screen 10, as shown in FIG. 6. Using the cursor move keys provided on the keyboard or keypad 7 of the printer, the user will set the asterisks (\*) on the monitor screen 10 at positions corresponding to his desired images while watching

the print 15, and press the set key (EXEC) or the like to register the asterisks (\*) in the printer.

The printer is constructed and operates to carry out the aforementioned color adjusting method as will be described in detail below with reference to FIGS. 7 to 10. In FIG. 7, the above gamma ( $\gamma$ ) data table is indicated with a reference 18.

FIG. 7 shows the construction of the gamma ( $\gamma$ ) data table 18. To produce an image of 25 frames for example, the table 18 stores at addresses 0 to 24 data  $\gamma_0$  to  $\gamma_{24}$ , for example, each of which is a combination of Y, M and C shown in FIG. 3. The combination of Y, M and C can be represented with an 8-bit data (0 to 255) for example. Normally, a color is determined by the combination of three colors Y, M and C at the time of printing. By changing the distribution of the Y, M and C little by little for each of the 25 frames in the image, it is possible to lay frames different from reference images in a predetermined distribution pattern. In FIG. 5 for example, a print 15<sub>0</sub> uses the data  $\gamma_0$  and a print 15<sub>1</sub> uses the data  $\gamma_1$ . The data  $\gamma_0$  to  $\gamma_{24}$  are necessary for production of an image of 25 frames. When an image of 49 frames different in hue from each other is used, data  $\gamma_0$  to  $\gamma_{48}$  are required.

The 25 frames in a print 15 shown in FIG. 5 form a matrix of 5 frames per column by 5 frames per row. The address of the gamma ( $\gamma$ ) data table 18 is changed by the image processor 4 to divide, by 5, the main scanning direction (one line) of the thermal print head of the printing block 5 while dividing the sub scanning direction by 5. Of course, 49 frames in a printed image include 7 frames

in column by 7 frames in row.

FIG. 8 is a timing chart showing times at which address in the gamma correction memory (table) 18 is changed from one to another in one line being printed by the thermal print head. The thermal print head has an internal shift register. The thermal print head prints data for a number of dots for one line while storing the data in the internal shift register with the main and sub scanning directions being changed. In FIG. 8, one print pulse is for one line. In the one line, a number  $g$  of dots in the main scanning direction for one frame can be set in dots, and the address in the gamma ( $\gamma$ ) data table 18 is changed per frame correspondingly to a set number of dots. The transfer rate of the data for the set number of dots is synchronous with a data clock DCK. Since the change of address in the gamma ( $\gamma$ ) data table 18 in one line at times  $\underline{d}$ ,  $\underline{e}$  and  $\underline{f}$  in FIG. 8 cannot be done by the software because the transfer rate is very high, so it is done by the hardware in the present invention. On the other hand, since the data transfer has not to be done at so high a speed at times  $\underline{a}$ ,  $\underline{b}$  and  $\underline{c}$  in FIG. 8, the address change in the sub scanning direction is done by the software under the control of the CPU 6.

Referring now to FIG. 9, there is illustrated in the form of a block diagram the image processor in the printer in FIG. 1. The image processor 4 to effect the aforementioned address change in the gamma ( $\gamma$ ) data table 18 in the main and sub scanning directions and YMC conversion will further be described herebelow with reference to FIG. 9. As shown, the image processor 4 includes a YMC converter

17 to convert the R, G and B data read from the memory 8 via the memory controller 3 to Y, M and C print data, a gamma ( $\gamma$ ) data table 18 provided for use to effect the aforementioned gamma ( $\gamma$ ) correction of the Y, M and C print data from the YMC converter 17, and an address change controller 20 to supply the gamma ( $\gamma$ ) data table 18 with an address change signal for the address change in the main scanning direction.

The YMC converter 17 converts the R, G and B data by inverting to provide Y, M and C print data as in the following:

When supplied with R, G and B data in 8 bits for example from the memory 8 via the memory controller 3, the YMC converter 17 converts the R, G and B data to Y, M and C print data of 8 bits and supplies them to A0-7 of the gamma ( $\gamma$ ) data table 18. The Y, M and C data supplied to A0-7 are changed in hue using 25 gamma ( $\gamma$ ) data  $\gamma_0$  to  $\gamma_{24}$  stored in the gamma ( $\gamma$ ) data table 18.

The change of the gamma ( $\gamma$ ) data for one line of the thermal print head, shown in FIG. 8, is effected with a change signal from the address change controller 20. The address change in the sub scanning direction in the gamma ( $\gamma$ ) data table 18 is effected by the software by CPU 6 as in the above.

The address change controller 20 includes a counter 23 which is supplied at a CLK terminal thereof with a data clock DCK sent via the memory controller 3 and counts dots in the main scanning direction, and an address controller 25 to generate main scanning-directional address change signals of 3 bits (OUT0, OUT1

and OUT2) for example based on a count COUNT VALUE from the counter 23 and a control signal CPU CONTROL from the CPU 6 to control the main scanning-directional address in the gamma ( $\gamma$ ) data table 18.

FIG. 10 is a block diagram of the address controller 25 in the image processor 4 in FIG. 9. As shown, the address controller 25 includes a register 26 which there is stored a number of dots counted in the main scanning direction for one frame, which will be the control signal CPU CONTROL from CPU 6, a comparator 27 to make comparison between the number of dots (reference value) supplied from the register 26 and a count from the counter 23 to determine whether they are same as each other, and a 3-bit counter 28 to count up when supplied with a one-shot pulse produced by the comparison 27 when the count is equal to the reference value.

The 3-bit main scanning-directional address change signals OUT0, OUT1 and OUT2 are necessary for a maximum of 8 divisions in the direction of one line. For a maximum of 4 divisions in the direction of one line, 2-bit main scanning-directional address change signals are required. For 9 divisions in the direction of one line, 4-bits main scanning-directional address change signals are required for a maximum of 16 divisions. That is, the main scanning-directional address change signals are required for a number of bits for a number of frames.

When the reference value set in the register 26 is equals to a count of dots in the main scanning direction, counted by the counter 23, the comparator 27 will

produce a one-shot pulse and supply it to the 3-bit counter 28. It is possible to change the address of gamma ( $\gamma$ ) data for 5 frames in the main scanning direction using the 3 bits from the 3-bit counter 28. The one-shot pulse from the comparator 27 is fed back to the counter 23 to reset the count in the counter 23 so that one frame can be set in dots, after completion of counting for one frame.

The image processor 4 generates image data for 25 frames changed in hue, and supplies the data to the printing block 5 which will print the image of 25 frames as shown in FIG. 5 on a printing medium by the thermal print head.

The image frames in the print 15 are made to correspond to the asterisks (\*) on the monitor screen 10 as shown in FIG. 6. The asterisk (\*) on the monitor screen 10 is set in a position corresponding to a desired image by operating the cursor key on the keyboard of the printer, and the desired image is registered in the printer by operating the set key (EXEC) key or the like.

Then, the image 11 shown in FIG. 4A is adjusted in color in the image processor 4 based on a selected gamma ( $\gamma$ ) data and printed out.

Thus, the color adjustment can be done at the printer shown in FIG. 1.

Note that it is also possible to display the desired images selected on the monitor screen 10 as shown in FIG. 6 by moving it about a reference one of the selected images and changing the gamma ( $\gamma$ ) data based on the reference image. The gamma ( $\gamma$ ) data may newly be acquired by calculation and stored at updated addresses in the gamma ( $\gamma$ ) data table 18.



According to the above embodiment of the present invention, first, the user can adjust the colors without knowing about the color matching. In the color matching, the ordinary user is experienced in the subtractive mixture of colors. In this case, the user cannot adjust the color of an image in colors obtained by the additive mixture, displayed on the monitor of a video player for example if he has no knowledge of the complementary relation between the colors. Also since the image displayed on the monitor is different in basic color appearance characteristic from the printed image, it is difficult to accurately correlate color variations in the image displayed on the monitor with those in the printed image. According to the present invention, the user can judge the color matching based on a final print (the user wants to have eventually), so he can adjust the colors without the aforementioned knowledge of the complementary relation between colors.

Secondly, the color matching can be done with reduced costs and time. In the conventional color matching, the "adjust and print" has to be repeated for the above reasons until a desired ideal hue is attained. As the result, printing material and time are wasted. According to the present invention, however, the printing material and time can be saved considerably.

Thirdly, no time is required for processing data in the memory. If it is intended to implement only the above two effects, an extra memory may be provided for use to process, therein, images different in hue from each other. In this case, however, the cost for the extra memory and time for image distribution at

addresses in the memory are disadvantageous. With the color adjusting method according to the present invention, the image colors can be real-time adjusted, so no time for data processing is required. No cost for such an extra memory is required and no firmware is required to support the extra memory.

Fourthly, a variation from one printing medium to another can be absorbed. For example, even if the ink ribbon shows a poor appearance characteristic of any color, the variation from one ink ribbon to another can be absorbed by adjusting the color by the color adjusting method according to the present invention.

As having been described in the foregoing, the present invention can provide a printer and color adjusting method in which the color adjustment can be done in short time and with low cost. That is, the consumption of the printing paper can be reduced during the color adjustment. The color adjustment can be done in a reduced time. The user can easily effect the color adjustment even with no knowledge of the colors. No extra memory is required for distribution of images at addresses in the memory and no hardware and firmware are required for support such an extra memory.

WHAT IS CLAIMED IS:

1. A printer to print a video signal using printing media including a printing ink ribbon and paper, the printer comprising:

an image processing means for storing a plurality of data different from each other in a value on which the color appearance characteristic of the printing media depends and converting, using the plurality of data, an image composed of R, G and B video signals based on the video signal to a Y, M and C complementary-color image consisting of a desired number of columns; and

means for printing an output from the image processing means using the printing media..

2. The printer as set forth in claim 1, wherein the image processing means has a memory means in which there is stored the plurality of data different from each other in gamma value upon which the color appearance characteristic of the printing medium depends.

3. The printer as set forth in claim 2, wherein the image processing means calculates the plurality of data difference in gamma value from each other with reference to a reference image and changes the addresses of the data in the memory means.

4. The printer as set forth in claim 1, wherein the image processing means has a complementary color converter in which the R, G and B images are converted to Y, M and C images being in the complementary relation with the R, G and B

images and further to Y, M and C complementary-color images for the desired number of columns.

5. The printer as set forth in claim 4, wherein the conversion to the Y, M and C complementary-color images for the desired number of frames is effected by an image dividing means which divides the Y, M and C complementary-color images by the hardware in a main scanning direction and by the software in a sub scanning direction to generate Y, M and C images for the desired number of columns.

6. The printer as set forth in claim 1, wherein the image processing means has a memory means in which there is stored the plurality of data different from each other in a gamma value upon which the color appearance characteristic of the printing medium depends, and a complementary color converter in which the R, G and B images are converted to Y, M and C images being in the complementary relation with the R, G and B images and further to Y, M and C complementary-color images for the desired number of columns using the plurality of data.

7. The printer as set forth in claim 6, wherein the conversion to the Y, M and C complementary-color images for the desired number of frames is effected by an image dividing means which divides the Y, M and C complementary-color images by the hardware in a main scanning direction and by the software in a sub scanning direction to generate Y, M and C images for the desired number of columns.

8. The printer as set forth in claim 1, wherein the printing medium includes a sublimation ink ribbon and printing paper.

9. A color adjusting method for use in a printer to print a video signal using printing media including a printing ink ribbon and paper, the method comprising steps of:

storing a plurality of data different from each other in a value on which the color appearance characteristic of the printing media depends and converting, using the video signal, an image composed of R, G and B video signals based on the video signal to a complementary-color image consisting of a desired number of columns;

printing an output from the image processing step using the printing media;

selecting a desired one of the plurality of images printed on the printing paper at the printing step; and

adjusting the colors according to the desired image selected at the selecting step.

10. The method as set forth in claim 9, wherein at the image processing step, the plurality of data different from each other in gamma value upon which the color appearance characteristic of the printing medium depends is stored.

11. The method as set forth in claim 10, wherein at the image processing step, the plurality of data difference in gamma value from each other is calculated with reference to a reference image and rewritten for storage.

12. The method as set forth in claim 9, wherein at the image processing step, the R, G and B images are converted to Y, M and C images being in the

complementary relation with the R, G and B images and further to Y, M and C complementary-color images for the desired number of columns.

13. The method as set forth in claim 12, wherein the conversion to the Y, M and C complementary-color images for the desired number of columns is effected by dividing the Y, M and C complementary-color images by the hardware in a main scanning direction and by the software in a sub scanning direction to generate Y, M and C images for the desired number of columns.

14. The method as set forth in claim 9, wherein the plurality of data different from each other in gamma value upon which the color appearance characteristic of the printing medium depends, is stored, the R, G and B images are converted to Y, M and C images being in the complementary relation with the R, G and B images and further to Y, M and C complementary-color images for the desired number of frames using the plurality of data.

15. The method as set forth in claim 14, wherein the conversion to the Y, M and C complementary-color images for the desired number of frames is effected by dividing the Y, M and C complementary-color images by the hardware in a main scanning direction and by the software in a sub scanning direction to generate Y, M and C images for the desired number of columns.

16. The method as set forth in claim 9, wherein the printing medium includes a sublimation ink ribbon and printing paper.

17. The method as set forth in claim 9, wherein at the selecting step, the desired

image is selected by prompting the user to select corresponding positions on a monitor screen to the plurality of images printed on the printing paper.

## ABSTRACT OF THE DISCLOSURE

With the conventional analog printer, the ordinary user is experienced in the subtract color mixture for adjustment of image colors. Therefore, when adjusting the colors in an image displayed on a monitor of a video player and set by the additive color mixture, the user cannot make any color matching if he is not well familiar with the complementary relation between colors.

The present invention proposes a printer and color adjusting method in which images of which a designated portion changed in color balance using a gamma ( $\gamma$ ) data table in an image processor are printed in one printing paper and the user is prompted to select his or her favorite one of the images for storage in the printer, thereby permitting to easily effect his desired color matching. Thus, the user can select an image having colors he desires from images actually used and set the selected data into the printer. Thus, after the color adjustment, a desired print whose set colors are automatically stored can be provided.



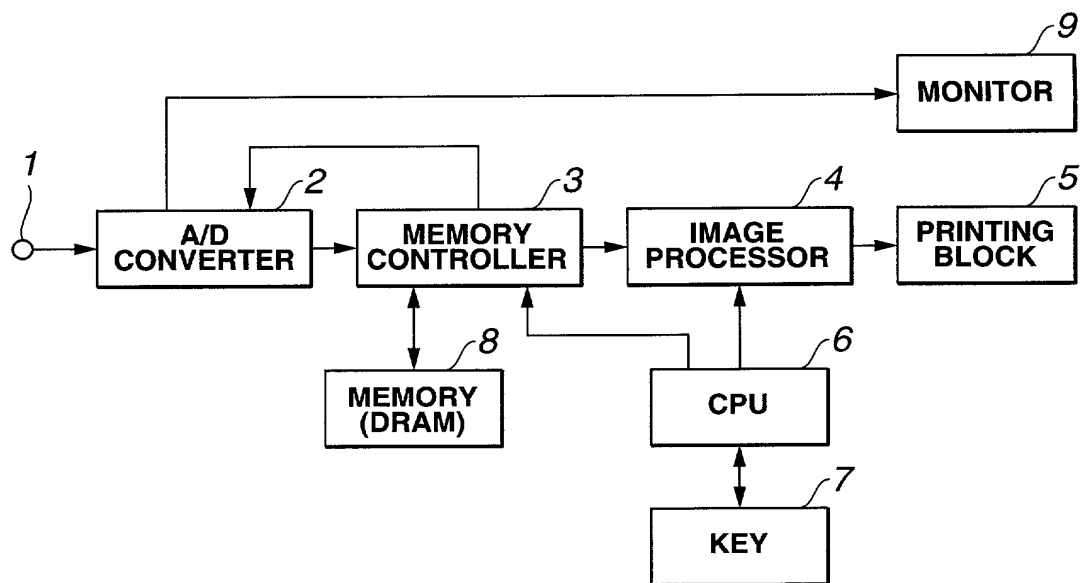


FIG.1

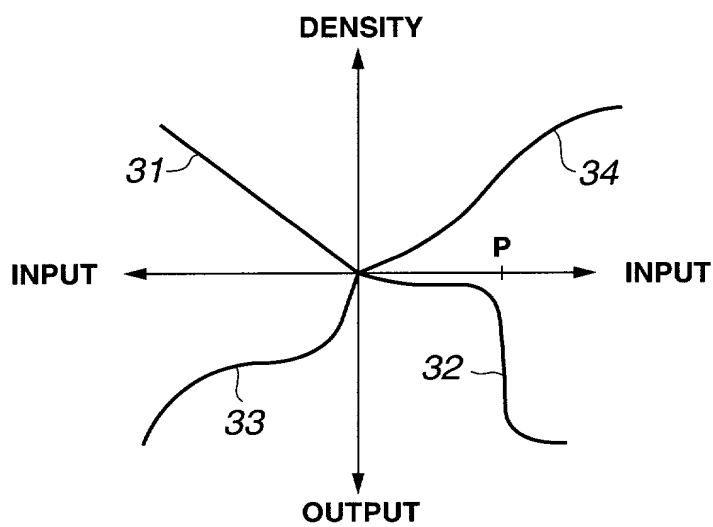


FIG.2

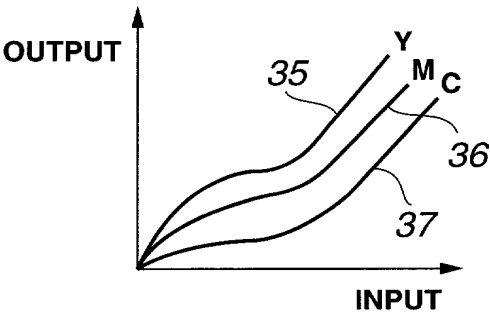


FIG.3

FIG.4A

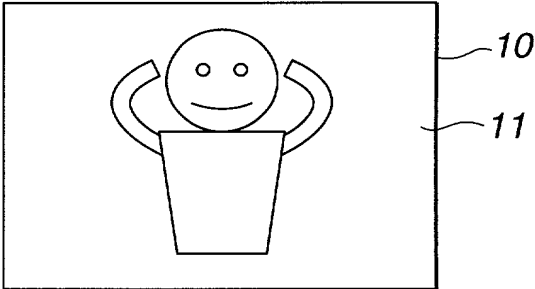
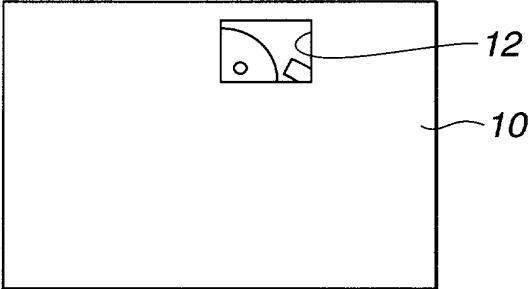


FIG.4B



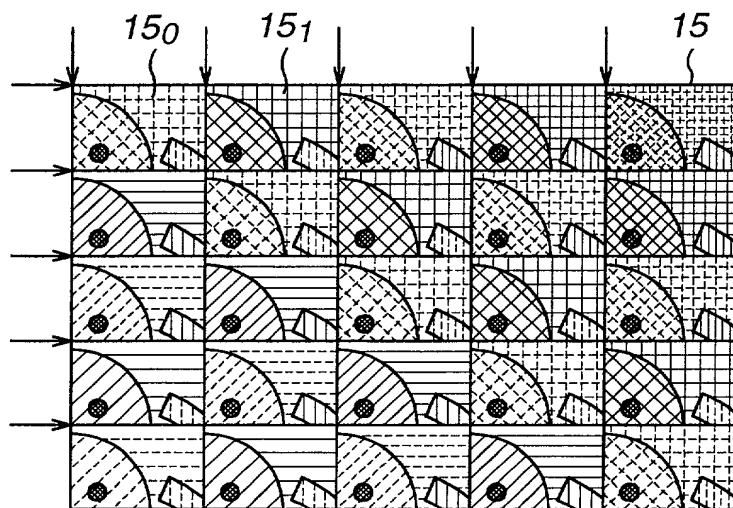


FIG.5

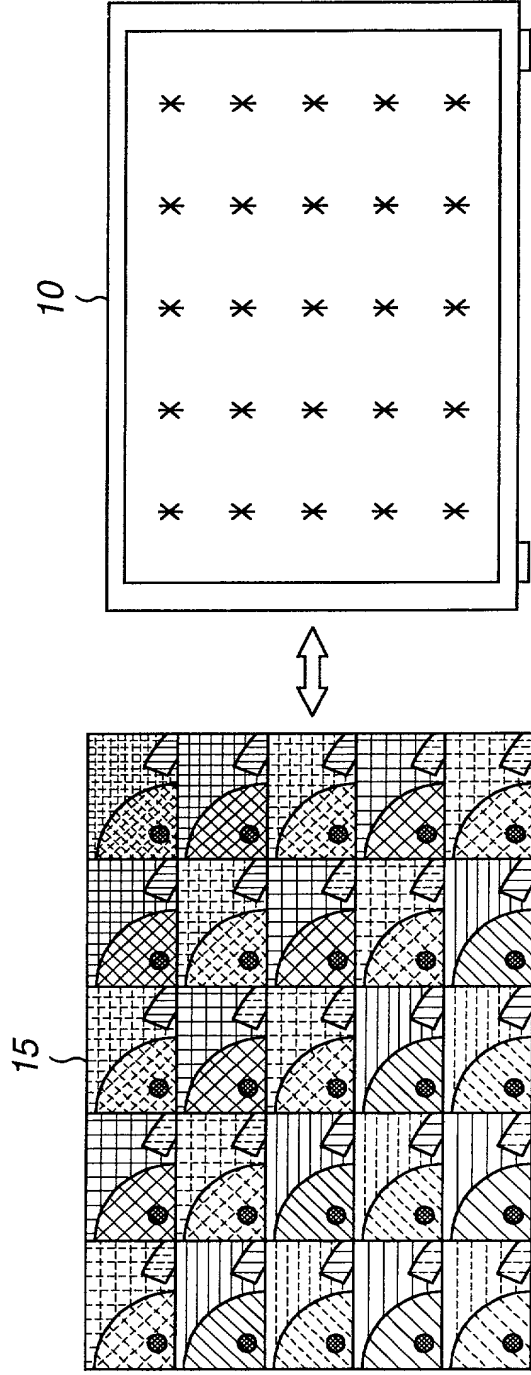


FIG.6

18

24	$\gamma_{24}$	
23	$\gamma_{23}$	
22	$\gamma_{22}$	
21	$\gamma_{21}$	
20	$\gamma_{20}$	
19	$\gamma_{19}$	
18	$\gamma_{18}$	
17	$\gamma_{17}$	
16	$\gamma_{16}$	
15	$\gamma_{15}$	
14	$\gamma_{14}$	
13	$\gamma_{13}$	
12	$\gamma_{12}$	
11	$\gamma_{11}$	
10	$\gamma_{10}$	
9	$\gamma_9$	
8	$\gamma_8$	
7	$\gamma_7$	
6	$\gamma_6$	
5	$\gamma_5$	
4	$\gamma_4$	
3	$\gamma_3$	
2	$\gamma_2$	
1	$\gamma_1$	
0	$\gamma_0$ (0 ~255)	

FIG.7

**FIG.8**



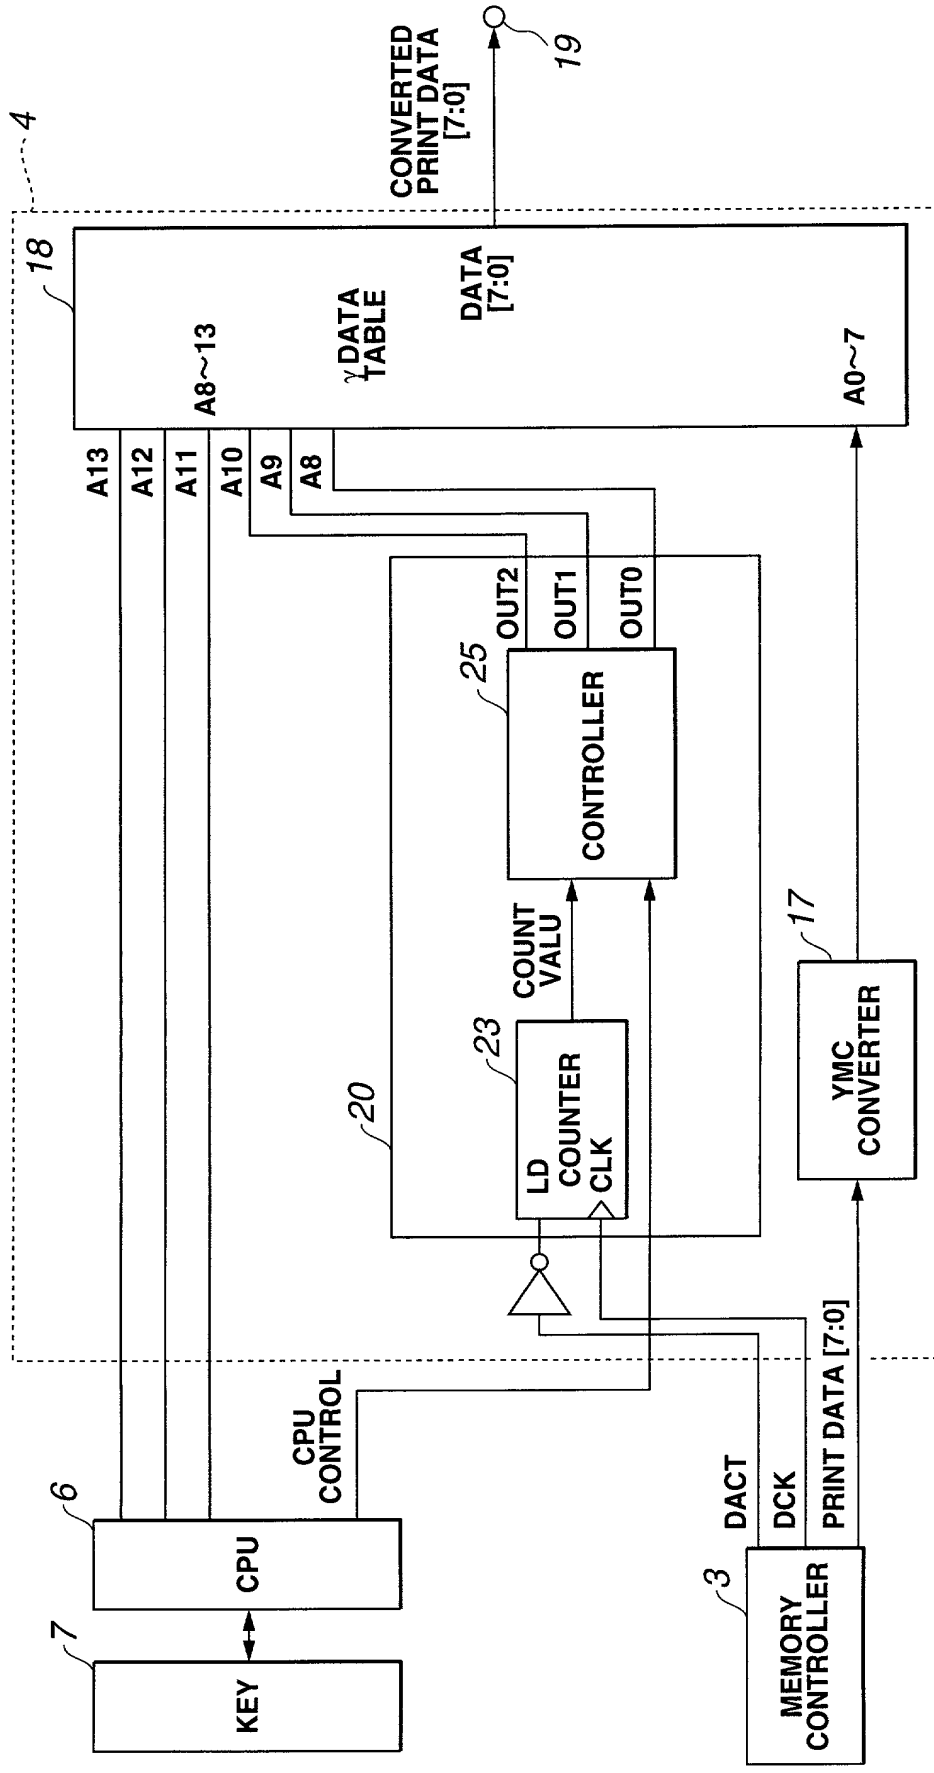


FIG.9

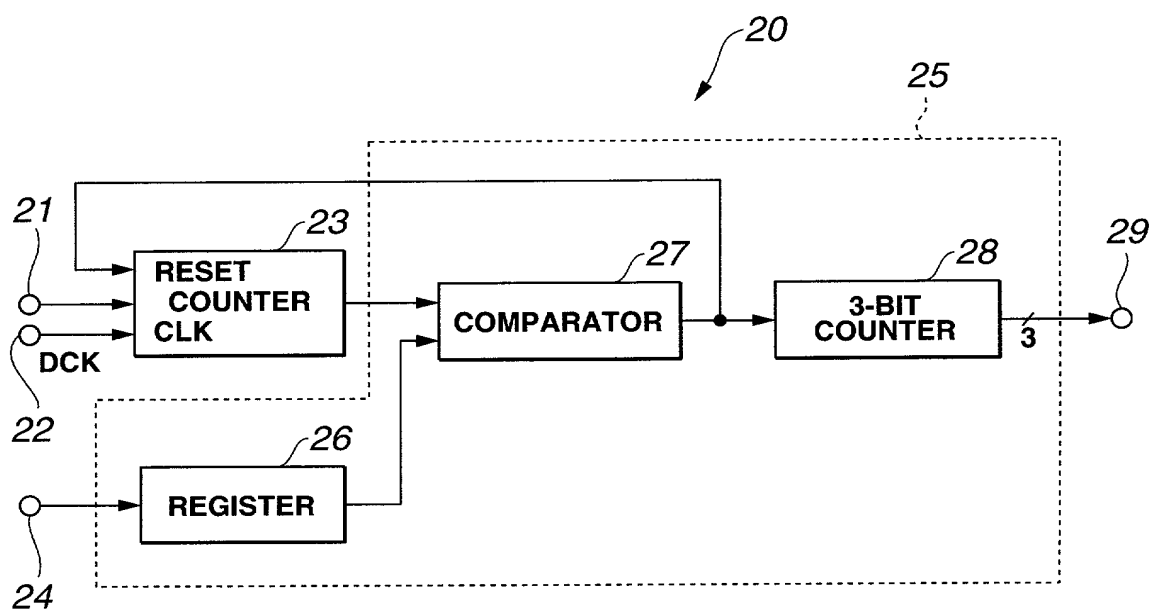

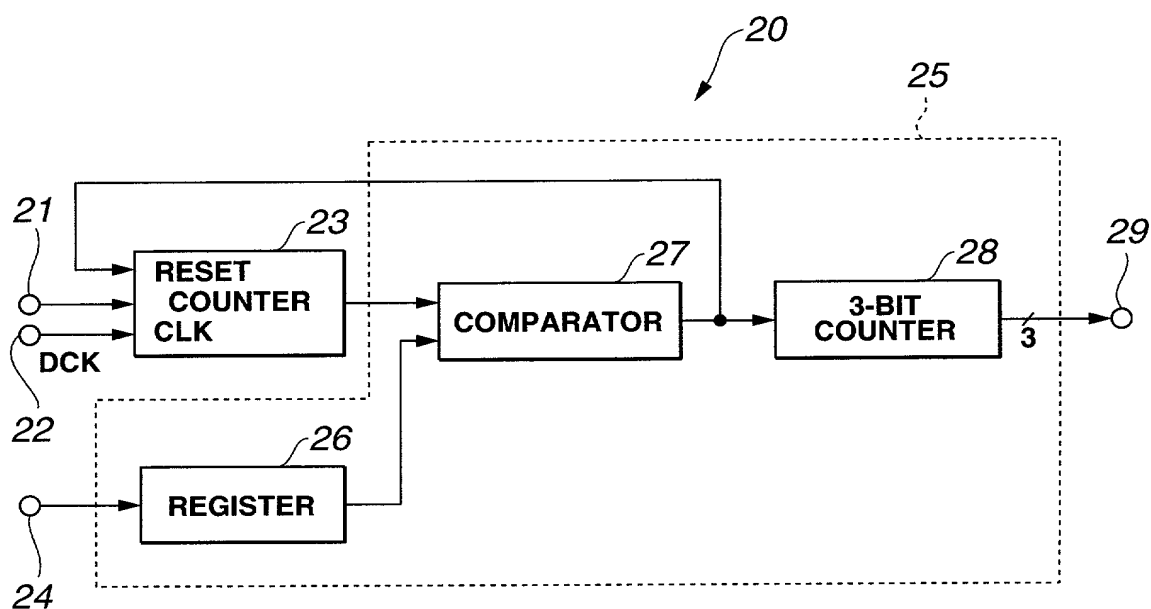

500p0803US00

PTO/SB/108 (8-98)

Approved for use through 9/30/98. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Declaration and Power of Attorney For Patent Application

### 特許出願宣言書及び委任状

### Japanese Language Declaration

### 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Printing Apparatus and Color

Adjusting Method

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
（該当する場合） \_\_\_\_\_ に訂正されました。

☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定議されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

# Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基き下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基き国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

## Prior Foreign Application(s)

外国での先行出願

P11-203724  
(Number)  
(番号)

(Number)  
(番号)

(Number)  
(番号)

JAPAN  
(Country)  
(国名)

(Country)  
(国名)

(Country)  
(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

16/07/1999  
(Day/Month/Year Filed)  
(出願年月日)

(Day/Month/Year Filed)  
(出願年月日)

(Day/Month/Year Filed)  
(出願年月日)

☐

☐

☐

私は、第35編米国法典119条(e)項に基いて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基いて下記の米国外の特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基き権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基き表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基き、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration  
(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の  
手続を米特許商標局に対して遂行する弁理士または代理人  
として、下記の者を指名いたします。(弁理士、または代理  
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint  
the following attorney(s) and/or agent(s) to prosecute this  
application and transact all business in the Patent and Trademark  
Office connected therewith (list name and registration number)

書類送付先

J. William Wigert, Jr. Reg. No. 24,582 Doyle B. Johnson Reg. No. 39,240  
Malcolm B. Wittenberg Reg. No. 27,028 Adam H. Tachner Reg. No. 40,343  
Nathan P. Koenig Reg. No. 38,210 Dmitry Milikovsky Reg. No. 41,999

Send Correspondence to:

Adam H. TACHNER  
Crosby, Heafey, Roach & May  
P.O. Box 7936  
San Francisco, CA 94120-7936

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Adam H. TACHNER  
(415) 543-8700

唯一または第一発明者名	Full name of sole or first inventor
	RYOGO KATAYAMA
発明者の署名	Inventor's signature
日付	Date
	<i>Ryogo Katayama</i> June 29, 2000
住所	Residence
	KANAGAWA, JAPAN
国籍	Citizenship
	Japanese
私書箱	Post Office Address
	c/o Sony Corporation
	7-35, Kitashinagawa 6-chome
	Shinagawa-ku, Tokyo, Japan
第二共同発明者	Full name of second joint inventor, if any
	TERUYASU HANAGAMI
第二共同発明者	Second inventor's signature
日付	Date
	<i>Teruyasu Hanagami</i> June 29, 2000
住所	Residence
	KANAGAWA, JAPAN
国籍	Citizenship
	Japanese
私書箱	Post Office Address
	c/o Sony Corporation
	7-35, Kitashinagawa 6-chome
	Shinagawa-ku, Tokyo, Japan

(第三以降の共同発明者についても同様に記載し、署名をす  
ること)

(Supply similar information and signature for third and subsequent  
joint inventors.)